


# EC centrifugal fan

forward-curved, single-intake

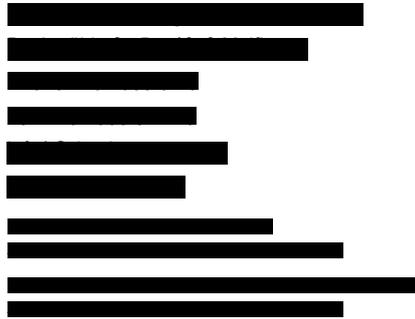

## Nominal data

Type	R3G146-AK07-05	
Motor	M3G055-DF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min <sup>-1</sup>	2320
Power consumption	W	166
Current draw	A	1.3
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	55

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
 Subject to change

## Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	47.2	32.2	09 Power consumption $P_{ed}$	kW	0.13
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	350
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	569
04 Efficiency grade N		59	44	10 Speed (rpm) n	min <sup>-1</sup>	3065
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.  
 The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-138752



R3G146-AK07-05

# EC centrifugal fan

forward-curved, single-intake

## Technical description


Weight	1.86 kg
Size	146 mm
Motor size	55
Rotor surface	Thick-film passivated
Impeller material	Sheet steel, galvanized
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1+
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	<ul style="list-style-type: none"><li>- Power limiter</li><li>- Motor current limitation</li><li>- Soft start</li><li>- Control input 0-10 VDC / PWM</li><li>- Control interface with SELV potential safely disconnected from the mains</li><li>- Overvoltage detection</li><li>- Thermal overload protection for electronics/motor</li><li>- Line undervoltage detection</li></ul>
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Connector with cable
Motor protection	Electronic motor protection
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE



# EC centrifugal fan


forward-curved, single-intake

## Product drawing

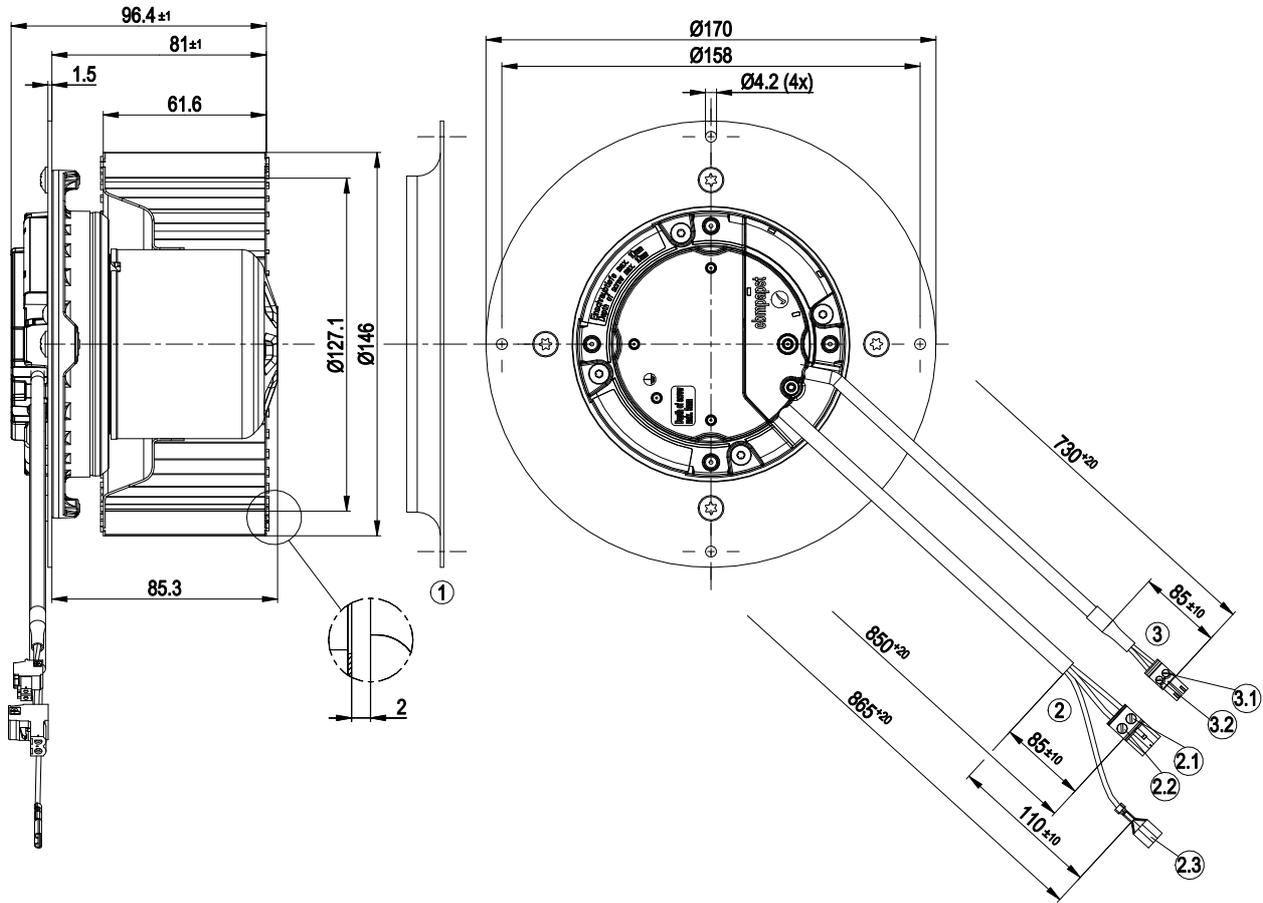

1	Accessory part: inlet ring 09576-2-4013 not included in scope of delivery
2	Cable PVC AWG20, 2-pole connector housing Phoenix MSTB 2.5/2-ST/5.08
2.1	N (blue)
2.2	L (black)
2.3	PE (green-yellow), flat push-on receptacle 6.3 x 0.8
3	Cable PVC AWG22, 2-pole connector housing Phoenix MC 1.5/2-ST-3.5
3.1	0-10 V PWM (yellow)
3.2	GND (blue)

## Accessory part

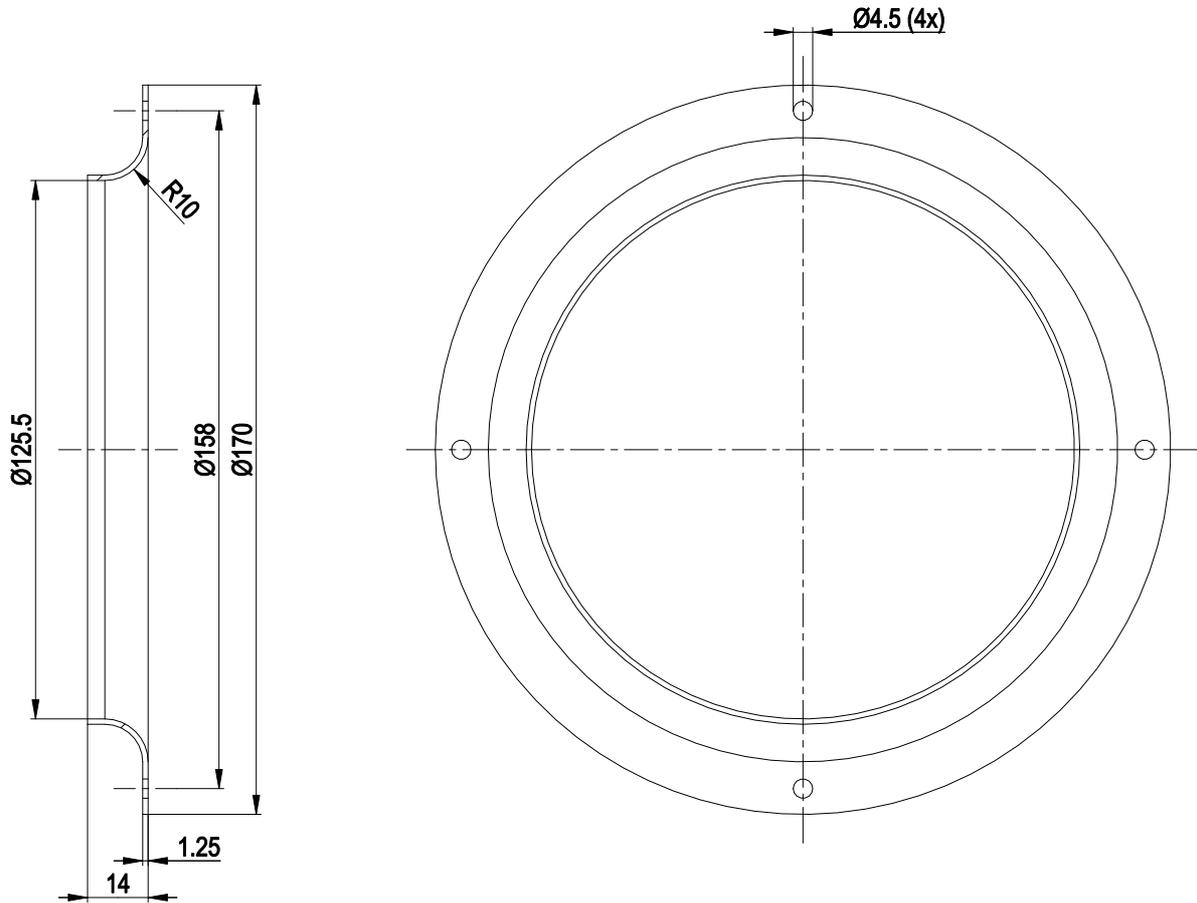


1 Accessory part: inlet ring 09576-2-4013 not included in scope of delivery

# EC centrifugal fan


forward-curved, single-intake

## Connection diagram

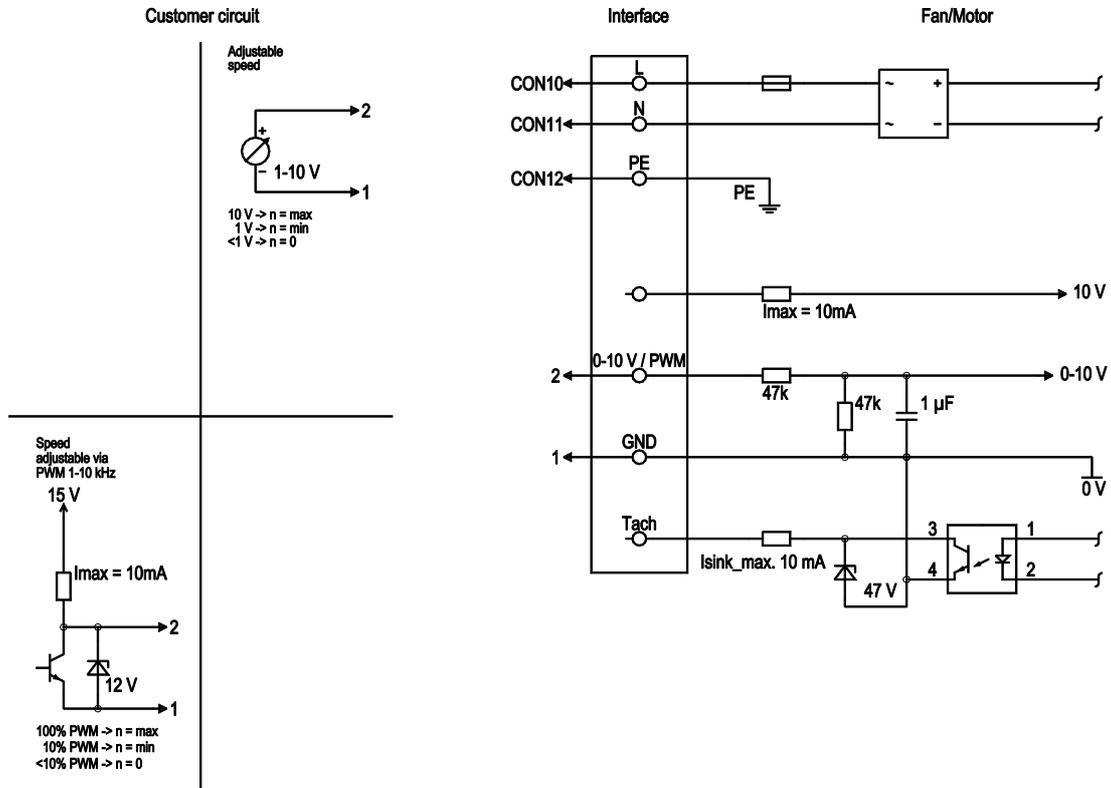

No.	Conn.	Designation	Color	Function/assignment
	CON10	L	black	Supply connection, power supply, phase, see nameplate for voltage range
	CON11	N	blue	Supply connection, power supply, neutral conductor, see nameplate for voltage range
	CON12	PE	green/yellow	Ground connection
	2	0- 10V PWM	yellow	0-10 V / PWM control input, $R_i=100\text{ k}\Omega$ , SELV
	1	GND	blue	Reference ground for control interface, SELV

## Curves: Air performance 50 Hz

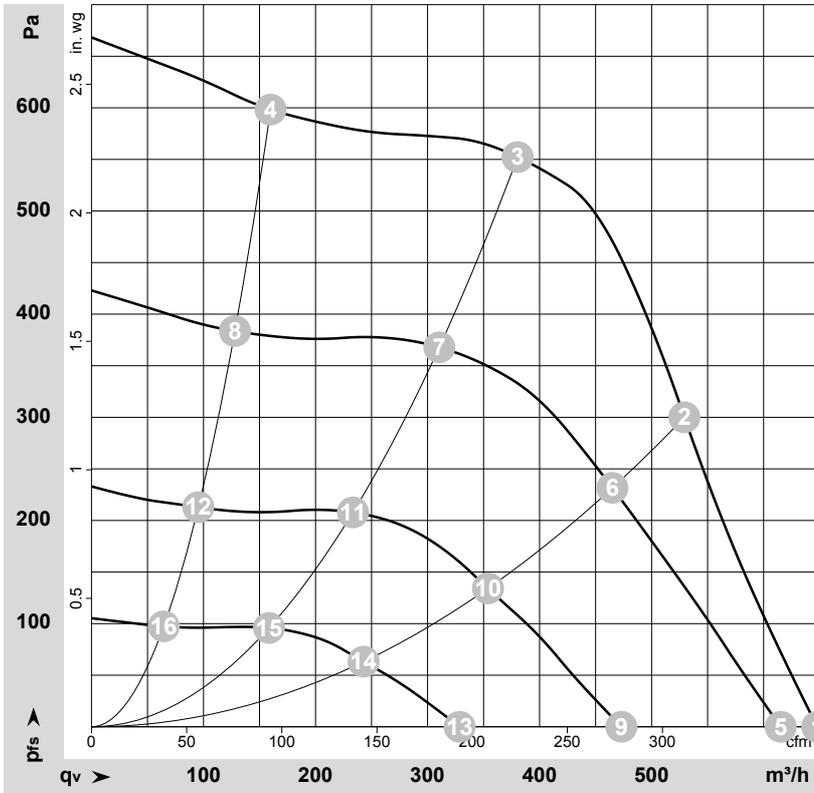

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-138752-1  
 Measurement: LU-138757-1  
 Measurement: LU-138758-1  
 Measurement: LU-138759-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	in. wg
1	1~	230	50	2320	166	1.30	70	76	650	0	380	0.00
2	1~	230	50	2660	166	1.30	69	75	530	300	310	1.20
3	1~	230	50	3035	147	1.05	68	75	380	550	225	2.21
4	1~	230	50	3250	89	0.64	68	75	160	600	95	2.41
5	1~	230	50	2215	147	1.03			615	0	360	0.00
6	1~	230	50	2360	114	0.81			465	232	275	0.93
7	1~	230	50	2495	82	0.58			310	368	180	1.48
8	1~	230	50	2620	51	0.37			130	384	75	1.54
9	1~	230	50	1725	70	0.49			475	0	280	0.00
10	1~	230	50	1815	54	0.39			355	134	210	0.54
11	1~	230	50	1895	39	0.29			235	208	135	0.84
12	1~	230	50	1975	25	0.19			95	213	55	0.86
13	1~	230	50	1210	26	0.20			330	0	195	0.00
14	1~	230	50	1255	21	0.17			245	63	145	0.25
15	1~	230	50	1300	16	0.13			160	96	95	0.39
16	1~	230	50	1350	11	0.10			65	97	40	0.39

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
 q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

