


unidirectional pump - series XV

STANDARD EUROPEAN PUMP
ø50.8 FLANGE - TAPER SHAFT

XV-3P

X	3	P	78	02	A	B	B	A
---	---	---	----	----	---	---	---	---

Series	X	series XV
Group	3	group 3
Category	P	unidirectional pump
Displacement	78	38
Flange	02	Ø50.8 right rotation
Shaft	A	C0001 - Tapered 1:8 - ø22 - key thk.4
Body	IN	B inlet - Ø51 Ø27 M10
	OUT	B outlet - Ø51 Ø27 M10
Cover	A	standard

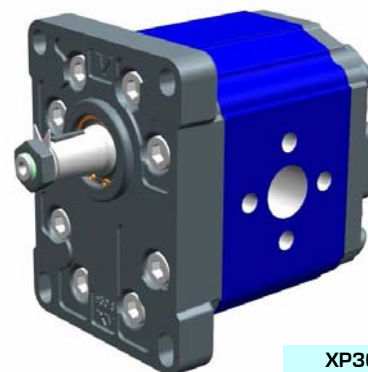

XP301

Technical data table


TYPE	Displacement cm3/rev	Max. Pressure		CODE							
		P1 bar	P3 bar	Left rotation				Right rotation			
XV-3P/15	14,89	300	320	X	3	P	66 01	A	A	A	A
XV-3P/18	17,37	300	320	X	3	P	68 01	A	A	A	A
XV-3P/21	21,10	280	300	X	3	P	70 01	A	A	A	A
XV-3P/27	26,97	250	270	X	3	P	72 01	A	A	A	A
XV-3P/32	32,27	250	270	X	3	P	74 01	A	B	B	A
XV-3P/38	38,47	250	270	X	3	P	78 01	A	B	B	A
XV-3P/43	43,44	250	270	X	3	P	79 01	A	B	B	A
XV-3P/47	47,16	230	250	X	3	P	80 01	A	B	B	A
XV-3P/51	50,88	230	250	X	3	P	81 01	A	B	B	A
XV-3P/54	54,60	230	250	X	3	P	82 01	A	B	B	A
XV-3P/61	60,81	230	250	X	3	P	83 01	A	C	C	A
XV-3P/64	64,53	210	230	X	3	P	85 01	A	C	C	A
XV-3P/70	70,74	200	220	X	3	P	86 01	A	C	C	A
XV-3P/74	74,46	180	200	X	3	P	87 01	A	C	C	A
XV-3P/90	86,87	150	170	X	3	P	89 01	A	C	C	A

P1) Max. working pressure - P3) Max. peak pressure

For heavy-duty applications, it is recommended to check the admissible torque of the shaft

Dimensions table

TYPE	Weight	A	B	D	E	F	D	E	F
	kg	mm	mm	IN			OUT		
XV-3P/15	7,010	124,0	61,0	ø20	40	M8	ø20	40	M8
XV-3P/18	7,070	126,0	62,0	ø20	40	M8	ø20	40	M8
XV-3P/21	7,150	129,0	63,5	ø20	40	M8	ø20	40	M8
XV-3P/27	7,250	133,0	65,5	ø20	40	M8	ø20	40	M8
XV-3P/32	7,390	138,0	68,0	ø27	51	M10	ø27	51	M10
XV-3P/38	7,520	143,0	70,5	ø27	51	M10	ø27	51	M10
XV-3P/43	7,630	147,0	72,5	ø27	51	M10	ø27	51	M10
XV-3P/47	7,710	150,0	74,0	ø27	51	M10	ø27	51	M10
XV-3P/51	7,790	153,0	75,5	ø27	51	M10	ø27	51	M10
XV-3P/54	7,870	156,0	77,0	ø27	51	M10	ø27	51	M10
XV-3P/61	8,010	161,0	79,5	ø36	62	M10	ø36	62	M10
XV-3P/64	8,090	164,0	81,0	ø36	62	M10	ø36	62	M10
XV-3P/70	8,220	169,0	83,5	ø36	62	M10	ø36	62	M10
XV-3P/74	8,300	172,0	85,0	ø36	62	M10	ø36	62	M10
XV-3P/90	8,570	182,0	90,0	ø36	62	M10	ø36	62	M10

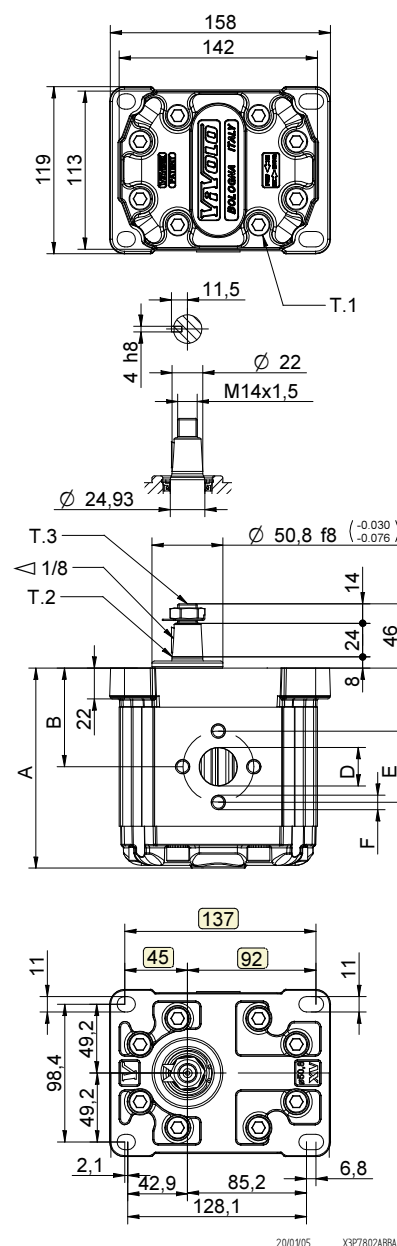

T.1 = 60÷65 [Nm] - screw tightening torque M10

T.3 = 75 [Nm] - torque wrench setting 22

T.2 = 482 [Nm] - admissible shaft torque (N.B. When choosing a shaft, always check the admissible torque).

Table of variations

XV-3P

ø50.8 FLANGE

ø50.8 FLANGE				Shaft				Cover			
Left rotation		Right rotation						Left rotation		Right rotation	
				CO001 - Tapered T.2 = 482 [Nm] 		CI001 - Parallel T.2 = 181 [Nm] 					
01		02		A		B		A			
				SCF03 - Splined T.2 = 223 [Nm] 		CI004 - Parallel T.2 = 180 [Nm] 					
				C		H		B			
				SCF04 - Splined T.2 = 264 [Nm] 							
				I				C			
								D			

Displacement	
TYPE	CODE
XV-3P/15	66
XV-3P/18	68
XV-3P/21	70
XV-3P/27	72
XV-3P/32	74
XV-3P/38	78
XV-3P/43	79
XV-3P/47	80
XV-3P/51	81
XV-3P/54	82
XV-3P/61	83
XV-3P/64	85
XV-3P/70	86
XV-3P/74	87
XV-3P/90	89

Standard bodies				
Displacement cm3/rev	Standard threads			
15	A - A	D - D	H - H	
18	A - A	D - D	H - H	
21	A - A	D - D	H - H	
27	A - A	E - E	H - H	
32	B - B	E - E	H - H	
38	B - B	E - E	H - H	
43	B - B	E - E	H - H	
47	B - B	E - E	H - H	
51	B - B	E - E	H - H	
54	B - B	E - E	H - H	
61	C - C	F - F		
64	C - C	F - F		
70	C - C	F - F		
74	C - C	F - F		
90	C - C	F - F		

Table showing standard flange and thread combinations available in stock

Body (threads/flanges)											
	A		B		C		D		E		F
	H		I		L		M		N		O
	P		Z								
Closed Body	Z										