

Sample gas probe GAS 222.20 Ex1

In many applications gas analysis is the key for safe and efficient control of process flows, environmental protection and quality assurance. In extractive gas analysis the location of the gas sampling point is crucial for the reproducibility and accuracy of the analysis results.

The specific filter capacity, corrosion resistance and functional equipment requirements for the probe arise from the composition of the sample gas.

However, operating costs are also an important criterion in the selection, as the sampling points are frequently located at hard to access points in the system. Effective particle filter backwashing options and low maintenance characterise the extensive GAS probe series.

Versions with Atex and IECEx approval

Heated probe with downstream filter and weather hood

The downstream filter can easily be removed by turning the handle 90°

The probe body and the area around the screw connection for the heated sample gas line are completely insulated

Self-regulating heater

For dust loads up to 2 g/m³


This probe is permitted for use in explosive areas.

Atex: Use in zone 1 and 21 and sampling from zone 0 and 20

IECEx: Use in zone 1 and sampling from zone 0



Flow chart

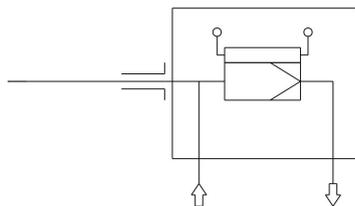

Technical Data

Gas Probe Technical Data

Ambient temperature:	-40 to +55 °C	
Permissible gas inlet temperatures:	Outer zone temperature class	Permissible gas inlet temperature
	T2	+135 °C
	T3	+135 °C
	T4	+130 °C
	T6	+70 °C
Self-regulating heater:	T4	+80 °C
	T6	+45 °C
Probe electrical data:	Power at 0 °C:	External circuit breaker type C:
	T4: 230 V, 100 W, 50/60 Hz 115 V, 100 W, 50/60 Hz	230 V, 2 A, 50/60 Hz 115 V, 3 A, 50/60 Hz
	T6: 230 V, 50 W, 50/60 Hz 115 V, 50 W, 50/60 Hz	
Max. operating pressure:	6 bar	
Max. flow rate:	1000 L/h	
Material:	1.4571	
Parts in contact with media:	Seals: Graphite/1.4404 and see filter	
Probe marking, depending on the selected options and temperature class:	<p>for zone 0/1: ATEX: Ex II 1G/2G Ex db¹ eb mb² IIC T5/T6...T1/T2 Ga/Gb IECEX: Ex db¹ eb mb² IIC T5/T6...T1/T2 Ga/Gb</p> <p>for zone 1: ATEX: Ex II 2G Ex db¹ eb mb² IIC T6...T2 Gb IECEX: Ex db¹ eb mb² IIC T6...T2 Gb</p> <p>for zone 0/21: ATEX: Ex II 1G/2D Ex db¹ eb mb² IIC T5 ... T1 Ga Ex tb mb² IIIC T80 °C ... T226 °C Db IECEX: -</p> <p>for zone 20/1: ATEX: Ex II 1D/2G Ex ta IIIC T120 °C ... T300 °C Da Ex db¹ eb mb² IIC T6 ... T2 Gb IECEX: -</p> <p>for zone 20/21: ATEX: Ex II 1D/2D Ex ta/tb mb² IIIC T120°C/T80°C...T300°C/T226°C Da/Db IECEX: -</p> <p>for zone 21: ATEX: Ex II 2D Ex tb mb² IIIC T80°C...T226°C Db IECEX: -</p> <p>¹ "db" only for GAS 222.21/31 versions with limit switch ² "mb" only for versions with solenoid valve</p>	
Applied standards:	IEC 60079-0 (Ed. 6.0); IEC 60079-7 (Ed. 5.0); IEC 60079-26 (Ed. 3.0); EN 60079-0:2012+A11:2013; EN 60079-7:2015; EN 60079-26:2015	
IECEX certificate number:	IECEX IBE 17.0024X	
ATEX certificate number:	IBExU17ATEX1088X	

Ordering instructions

The item number is a code for the configuration of your unit. Please use the following model key:

46222201	X	0	X	0	9	0	0	0	Product Characteristics						
															Flange
	0	1													Flange DN65 PN6
	0	2													Flange DN3"-150
	x	x													Other
															Hazardous area
															Outside
	4														Zone 1 (Atex/IECEX)
	7														Zone 21 (Atex)
	9														none
															Inside
	3														Zone 0 (Atex/IECEX)
	4														Zone 1 (Atex/IECEX)
	6														Zone 20 (Atex)
	7														Zone 21 (Atex)
	9														none
															Temperature class inside/outside (dust only ATEX)
															Ga/Gb
															Ga/Db
															Da/Gb
															Da/Db
	4														T3/T4
															T3/T130°C
															T175°C/T4
															T175°C/T130°C
	6														T5/T6
															T5/T80°C
															T120°C/T6
															T120°C/T80°C
															Temperature class inside/outside (dust only ATEX)
															Gb/Gb
															Gb/Db
															Db/Gb
															Db/Db
	4														T4/T4
															T4/T130°C
															T130°C/T4
															T130°C/T130°C
	6														T6/T6
															T6/T80°C
															T80°C/T6
															T80°C/T80°C
															Power supply sample probe
		1													115 V
		2													230 V
															Calibration gas port
			0												No
			1												6 mm
			2												6 mm with check valve
			3												1/4"
			4												1/4" with check valve

Options

The base unit becomes functional by adding accessories suitable for the application. Please refer to accessory data sheet no. 461099 for information.

Please also refer to data sheet no. 461000 "GAS 222 Gas Probes" for a general description.

Dimensions

